


3E Greenstack Series


The OPzV series adopts an Immobilized Gel and Tubular Positive Plate technology. It offers high reliability and stable performance. By using die-casted positive grid and patented active material formula, it exceeds the DIN standard values and offer 20+ years design life in float service. It is very suitable for cyclic use under extreme operating conditions. This series is recommended for telecom outdoor applications, renewable energy systems and other harsh environment applications.

SPECIFICATIONS

Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (20°C)	20 Years
Nominal Capacity (20°C)	150 Ah @ 10HR-rate (to 1.80Vpc)
Dimension (mm)	L522mm x W240mm x H222mm
Approx. Weight	56 kg (123.4 lbs)
Terminal Type	Female Copper Insert M8 (torque:10~12N.m)
Internal Resistance	Approx. 0.004 Ohm (fully charged @ 20°C)
Max. Charge Current	40A
Max. Discharge Current (5S)	800 A
Short Circuit Current	2160 A
Self Discharge	Approx. 3% per month @ 20°C
Ambient Temperature	Discharge: -20~60°C Charge: -20~60°C Storage: -20~45°C
Float Charge Voltage (20~25°C)	13.5-13.7V (-3mV/ cell/ °C)
Equalize and cycle Use Charge Voltage (20~25°C)	14.1-14.5V (-5mV/ cell / °C)
Container Material	ABS (UL94-V0 optional)

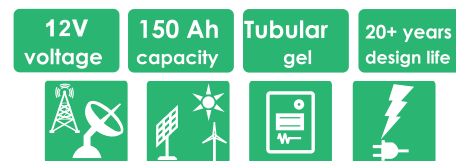

DIMENSIONS

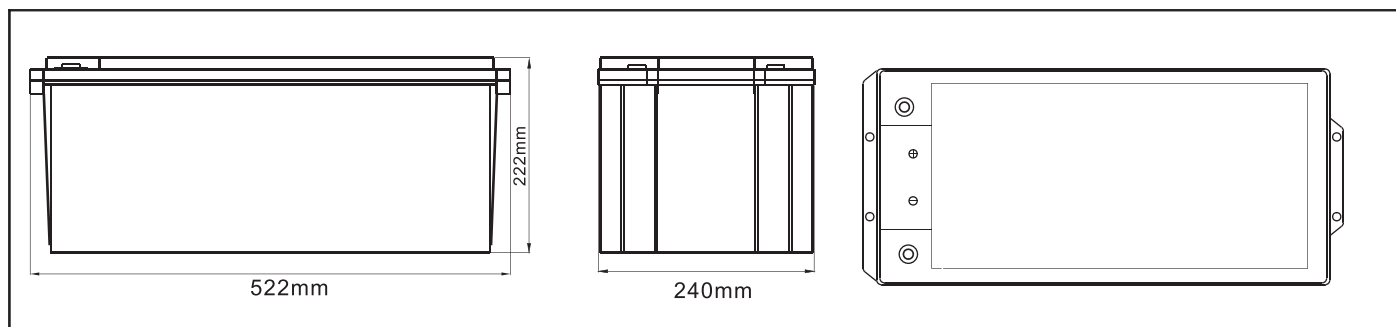

BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (20°C)

F.V/Tim e	10m in	15m in	30min	1h	2h	3h	5h	8h	10h
1.90V	55.0	53.5	50.0	42.0	35.8	30.0	22.2	15.9	13.1
1.87V	75.0	70.0	62.0	49.0	40.0	33.1	24.1	16.9	13.9
1.85V	86.2	79.0	68.0	53.5	44.1	35.6	25.7	17.7	14.4
1.83V	100	88.0	73.5	59.0	47.1	37.6	26.3	18.2	14.7
1.80V	112	102	82.3	65.0	49.7	39.4	26.8	18.5	15.0
1.75V	119	112	96.5	70.8	51.9	40.5	27.3	18.8	15.5
1.70V	130	123	106	74.8	53.9	41.3	27.8	19.1	15.8
1.65V	151	139	116	79.5	55.4	42.0	28.4	19.4	16.1
1.60V	165	152	123	82.0	56.6	42.8	29.0	19.7	16.4

Constant Power Discharge Characteristics: W/cell (20°C)

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.90V	106	104	97.4	82.4	70.7	59.7	44.5	32.0	26.5
1.87V	142	133	119	94.6	78.2	65.1	47.9	33.7	27.8
1.85V	161	148	129	102	85.2	69.3	50.4	35.0	28.7
1.83V	186	163	137	111	90.0	72.4	51.0	35.8	28.9
1.80V	205	187	152	121	93.8	75.2	51.5	35.8	29.2
1.75V	214	202	176	130	96.6	76.1	51.8	36.0	29.8
1.70V	229	218	190	136	99.1	76.6	52.1	36.2	30.1
1.65V	263	242	204	142	101	77.1	52.6	36.4	30.4
1.60V	280	260	212	144	101	77.3	53.1	36.7	30.6

PARAMETERS FOR SOLAR & WIND APPLICATIONS

Long time discharge capacity for Solar & Wind applications

Capacity	C20 (Ah)	C24 (Ah)	C48 (Ah)	C72 (Ah)	C100 (Ah)	C120 (Ah)	C240 (Ah)
OPzV12-150	165	170	183	189	191	193	199
Final Voltage	1.80V	1.85V					

Solar & Wind applications parameters settings

Over voltage disconnect:	2.45±0.01V/cell @ 20~25°C
Regulation/equalize voltage:	2.40±0.01V/cell @ 20~25°C
Array reconnection voltage:	2.25±0.005V/cell @ 20~25°C
Float voltage setting:	2.27±0.005V/cell @ 20~25°C
Low voltage alarm voltage:	1.95±0.005V/cell @ 20~25°C
Low voltage disconnect:	1.90±0.005V/cell @ 20~25°C
Load reconnect voltage:	2.09±0.01V/cell @ 20~25°C
Temp. compensate coefficient:	-5mV/cell/°C

CHARACTERISTICS

